


CAMBRIAN REPAIR SYSTEM

- 1.1 REMOVE DAMAGED TILE AND HEAD NAIL FIXING.
- 1.2 REMOVE NIBS FROM REPLACEMENT SLATE AND SLIDE INTO POSITION
- 1.3 MARK AND DRILL SCREW HOLES WITH NO. 8 MASONRY DRILL, 75MM HORIZONTAL, 280MM VERTICAL (SEE BELOW, DIMENSIONS ARE A GUIDE ONLY).
- 1.4 ASSEMBLE THE SCREW, CAP AND WASHERS, SCREW ASSEMBLY INTO BATTEN UNTIL THE NEOPRENE WASHER WILL NOT ROTATE. DO NOT OVERTIGHTEN THE SCREW AS YOU MAY BREAK THE SLATE.
- 1.5 USE TWO SCREW FIXINGS PER REPLACEMENT SLATE.

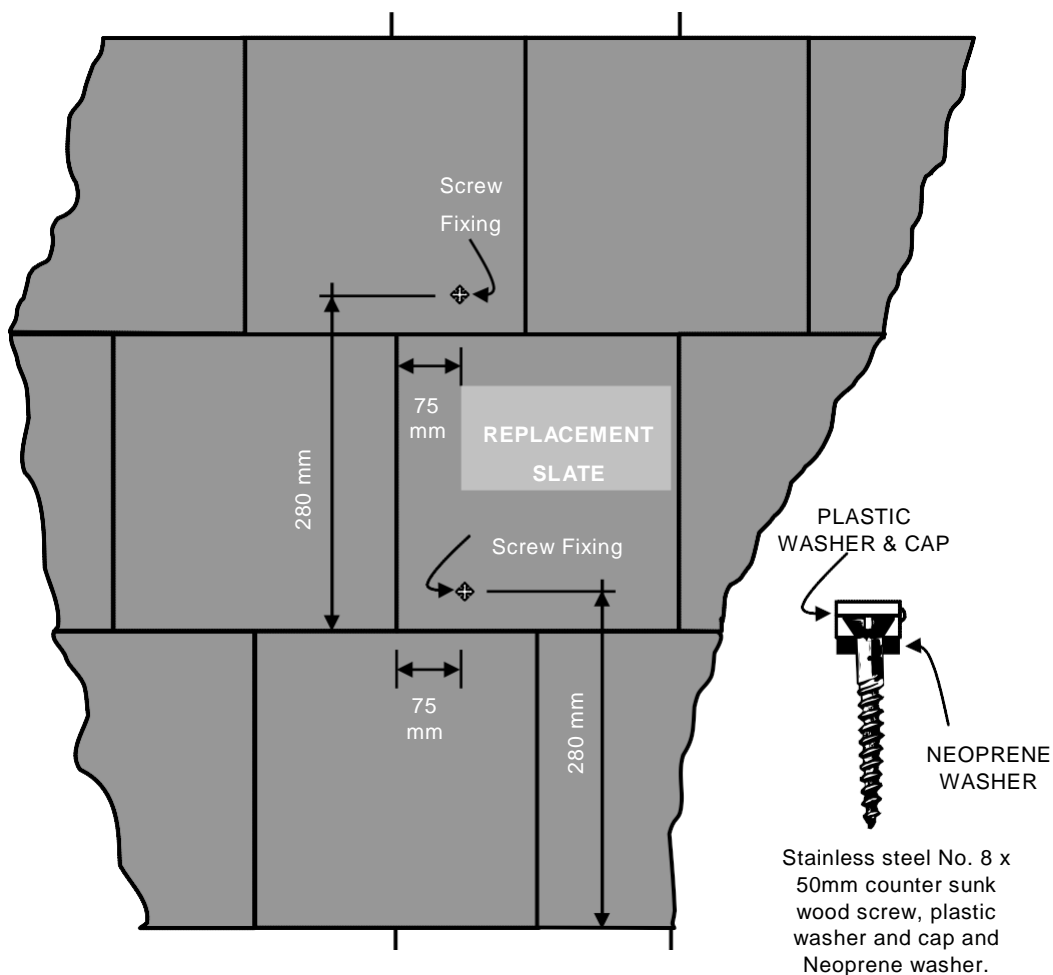

Redland Technical Solutions
 Tel 0870 870 2595
 Fax 0870 870 2596
 email technical.redland@monier.com

The wood screws (4.0 x 50mm S/S Countersunk) can be purchased at Travis Perkins (ref 517553). The plastic caps used to hide the head of the screw, can be purchased at B&Q (ref EAN: 0000003211106).