


BONDING GUTTER


Redland Bonding Gutter is a mortar-free, dry-fixed gutter designed to weatherproof the junction between two adjacent roof coverings.

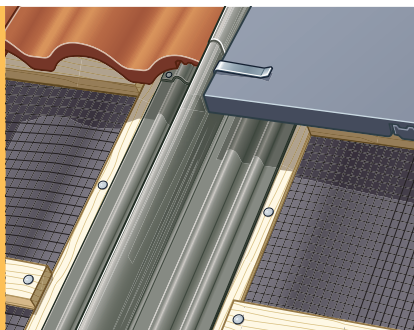


DRY VALLEY: PRODUCT CODES AND DESCRIPTIONS

Description	Product Code		Pack Contents
Bonding Gutter – High Profile	9578		1 x 3m Bonding Gutter
Bonding Gutter – Low Profile	9580		1 x 3m Bonding Gutter


Rafter Pitch	<22.5°	22.5° - 29°	30° - 39°	>39°
Overlap (mm)	350	300	200	150




Bonding Gutter – Low Profile



Bonding Gutter – High Profile

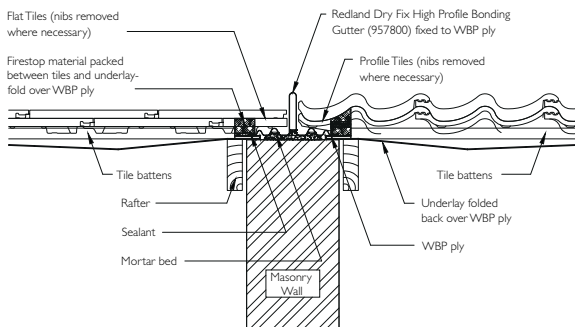

BONDING GUTTER – HIGH PROFILE TYPICAL INSTALLATION WITH FIRE BREAK – FLAT TILES AND PROFILE TILES

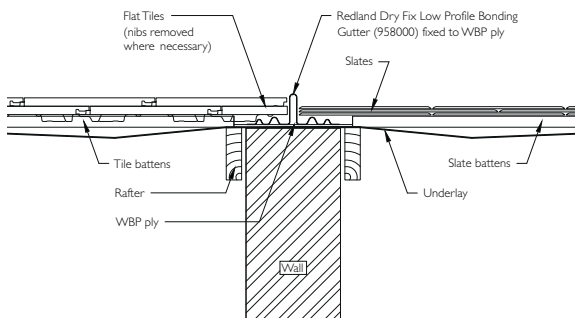

BONDING GUTTER – LOW PROFILE TYPICAL INSTALLATION – FLAT TILES AND SLATES

For situations where the Bonding Gutter is to be used over non-fire-break walls, the underlay can be carried through underneath the Bonding Gutter –

but the tiling battens should be terminated either side of a central 6mm WBP plyboard, into which the Bonding Gutter is fixed.

BONDING GUTTER



1

Establish the position of the Bonding Gutter. Underlay and batten the roof in accordance with the construction details. Position the Bonding Gutter onto established line and nail through outer-flange into 6mm WBP ply below at maximum 500mm centres. When joining lengths of Bonding Gutter use the minimum overlaps specified.



2

The slates and tiles should be laid as close as possible to the central upstand on both sides with care taken to avoid any distortion and maintain the straight line appearance of the profile. Mark the centre line of the Bonding Gutter and remove slates or tiles for cutting as required so as to maintain the correct bond of the slating and tiling.



3

Where the tile nibs interfere with the Bonding Gutter, they should be carefully removed.



4

Ensure all tiles and cut tiles adjacent to the Bonding Gutter are mechanically fixed in accordance with the Redland fixing specification for the roof. The standard nails and clips can be used. For half slates and other small cut tiles either Redland Head Clip (*product code 9518*), and/or Redland Kro-Clips (*product code 9142*) can be used. Complete the slating and tiling as required.