



STONEWOLD II

Stonewold II is the original large format interlocking slate used on thousands of roofs across the country.

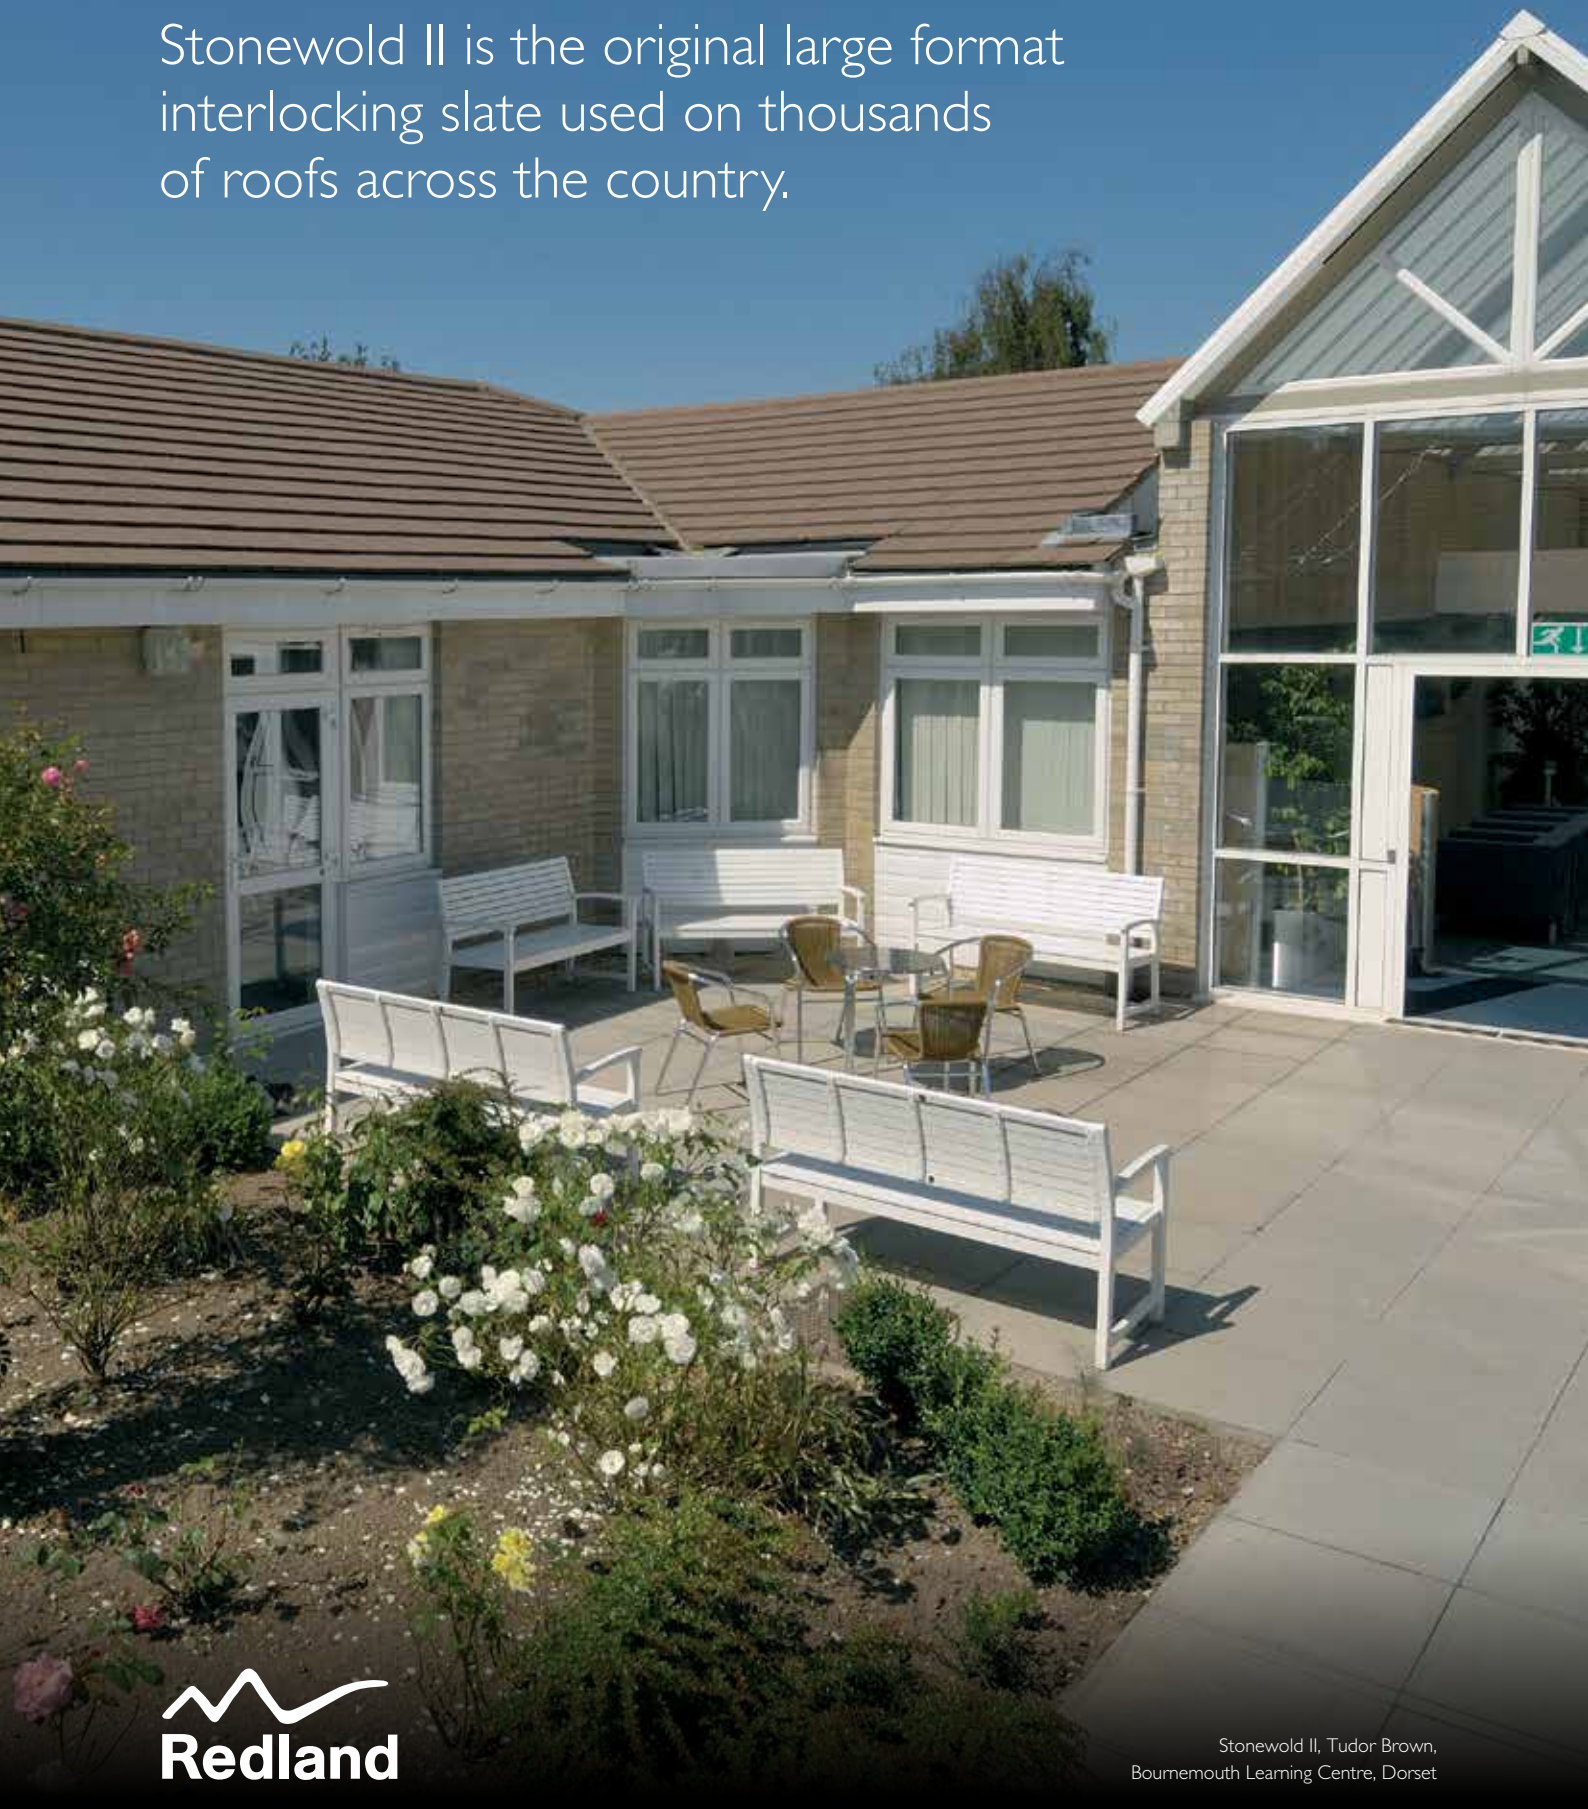

Stonewold II, Tudor Brown,
Bournemouth Learning Centre, Dorset



STONEWOLD II

With its imperial size and proven track record, Stonewold II is quick to install and is particularly suited to larger roofs.

KEY ADVANTAGES

- Imperial size large format tile
- Proven track record in wide range of applications
- Particularly well suited to large area roofs


TECHNICAL DATA

Size (overall)	430 x 380mm
Minimum Pitch	17.5°
<small>(The minimum pitch is based on a maximum rafter length of 10 metres. For rafter lengths greater than this, please contact the Technical Solutions Hotline on 03708 702595)</small>	
Maximum Pitch (subject to fixing specification)	44°
Minimum Headlap	75mm
Maximum Headlap	125mm
Minimum Gauge/Batten Spacing	305mm
Maximum Gauge/Batten Spacing	355mm
Hanging Length (approx.)	379mm
Cover (all figures are net and do not allow for wastage)	
Linear cover of 1 slate	343mm
Covering capacity	8.2 slates/m ² at 355mm gauge
Weight	49kg/m ² at 355mm gauge
per pallet, including pallet (approx.)	0.84 tonnes
per 1000	6.00 tonnes
Battens Required (at max. gauge)	2.82m/m ²
Batten Size	
Rafter centres up to 450mm	38 x 25mm
Rafter centres up to 600mm	50 x 25mm
Fixing Clips	Eaves, Verge, Slate & Double Battening Clips
Pallet Quantities	Slates per pallet 132 / Slates per pack 22 / Packs per pallet 6

FITTINGS & ACCESSORIES

Verge	Ambi-Dry Verge
Hip	Universal Angle Hip Dry Hip System Continuous Hip System
Valley	125 GRP Valley Dry Valley
Ridge	Universal Angle Ridge Universal Angle Monoridge
Ventilation Systems	RedVent EavesVent RedVent 25 Over-Fascia Vent Rapid Eaves Vent Top Edge Abutment Ventilation DryVent Ridge Continuous Ridge System Uni-Vent Rapid Ridge/Hip DryVent Monoridge 8.8k ThruVent Tile

COLOURS

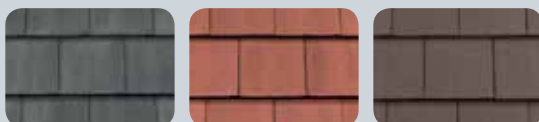

30 Slate Grey

34 Terracotta

36 Tudor Brown