


WESTMINSTER SLATE

Westminster Slate is a high-performance clay roof covering that needn't break your budget.



Westminster Slate, City Black, Clay Universal Angle Ridge, Red South Cemey, Gloucestershire

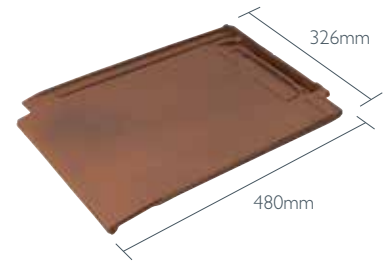

WESTMINSTER SLATE

An elegant natural clay slate offering savings in both materials and labour. Simple and quick to install.

KEY ADVANTAGES

- Engineered clay slate with hidden interlock
- Tapered leading edge for an exceptionally thin appearance
- For pitches as low as 17.5°

TECHNICAL DATA

Size (overall)	480 x 326mm
Minimum Pitch	17.5°
<small>(The minimum pitch is based on a maximum rafter length of 10 metres. For rafter lengths greater than this, please contact the Technical Solutions Hotline on 03708 702595)</small>	
Maximum Pitch (subject to fixing specification)	90°
Minimum Headlap	110mm
Maximum Headlap	140mm
Minimum Gauge/Batten Spacing	340mm
Maximum Gauge/Batten Spacing	370mm
Hanging Length (approx)	452mm
Cover (all figures are net and do not allow for wastage)	
Linear cover of 1 slate	280mm
Covering capacity	9.7 slates/m ² at 370mm gauge
Weight	
47.5kg/m ² at 370mm gauge	
per pallet, including pallet (approx.)	1.05 tonnes
per 1000	4.9 tonnes
Battens Required (at max. gauge)	2.7m/m ²
Batten Size	
Rafter centres up to 450mm	38 x 25mm
Rafter centres up to 600mm	50 x 25mm
Fixing Clips	Eaves, Verge & Slate Clips
Nail Size for Slates #	55 x 2.65mm (S/S)
Pallet Quantities	Slates per pallet 210 / Slates per pack 5 / Packs per pallet 42

#(S/S) Stainless Steel Annular ring shanked

FITTINGS & ACCESSORIES

Hip	Rosemary Third Round Hip
	Clay Universal Angle Hip
	Dry Hip System
	Continuous Hip System
Valley	125 GRP Valley
	Dry Valley
Ridge	Rosemary Half Round Ridge
	Clay Universal Angle Ridge
Ventilation Systems	RedVent EavesVent
	RedVent 25 Over-Fascia Vent
	Rapid Eaves Vent
	Top Edge Abutment Ventilation
	DryVent Ridge
	Continuous Ridge System
Uni-Vent Rapid Ridge/Hip	
	8.8k ThruVent Tile

COLOURS



79 City Black

80 Cardinal Red

82 Old College Red